

US
P. 01 057

117
De 020004
02/01

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>(51) International Patent Classification ⁶ : H05B 41/231</p> | <p>A1</p> | <p>(11) International Publication Number: WO 95/35645 (43) International Publication Date: 28 December 1995 (28.12.95)</p> |
| <p>(21) International Application Number: PCT/IB95/00392 (22) International Filing Date: 22 May 1995 (22.05.95) (30) Priority Data: 94201784.9 22 June 1994 (22.06.94) EP (34) Countries for which the regional or international application was filed: NL et al. (71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 5, Kista, S-164 85 Stockholm (SE). (72) Inventors: DERRA, Gunther, Hans; Krauthausener Strasse 67, D-5100 Aachen (DE). FISCHER, Hanns, Ernst; Aufderbohe 82, D-5190 Stolberg (DE). GANSER, Hans, Günther; Brockenberg 7A, D-52223 Stolberg (DE). MONCH, Holger; Viergrenzenweg 53, NL-6291 BN Vaals (NL). (74) Agent: EVERS, Johannes, Hubertus, Maria; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).</p> | | <p>(81) Designated States: CA, CN, JP, KR, MX, SG, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> |
| <p>(54) Title: METHOD AND CIRCUIT ARRANGEMENT FOR OPERATING A HIGH PRESSURE DISCHARGE LAMP (57) Abstract <p>The invention relates to a circuit arrangement for operating a high pressure discharge lamp comprising input terminals (K1, K2) for connection to a supply voltage source, and means, coupled to the input terminals, for supplying an alternating lamp current to the high pressure discharge lamp. According to the invention, the circuit arrangement also comprises means III for generating a current pulse in each half period of the lamp current, said current pulse having the same polarity as the lamp current and being superimposed on the lamp current in the latter part of a predetermined fraction of the half periods of the lamp current. As a result, flickering of the discharge arc during lamp operation is substantially suppressed.</p></p> <div data-bbox="695 1115 1333 1499"></div> | | |

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | |
|----|--------------------------|----|---------------------------------------|----|--------------------------|
| AT | Austria | GB | United Kingdom | MR | Mauritania |
| AU | Australia | GE | Georgia | MW | Malawi |
| BB | Barbados | GN | Guinea | NE | Niger |
| BE | Belgium | GR | Greece | NL | Netherlands |
| BF | Burkina Faso | HU | Hungary | NO | Norway |
| BG | Bulgaria | IE | Ireland | NZ | New Zealand |
| BJ | Benin | IT | Italy | PL | Poland |
| BR | Brazil | JP | Japan | PT | Portugal |
| BY | Belarus | KE | Kenya | RO | Romania |
| CA | Canada | KG | Kyrgyzstan | RU | Russian Federation |
| CF | Central African Republic | KP | Democratic People's Republic of Korea | SD | Sudan |
| CG | Congo | KR | Republic of Korea | SE | Sweden |
| CH | Switzerland | KZ | Kazakhstan | SI | Slovenia |
| CI | Côte d'Ivoire | LJ | Liechtenstein | SK | Slovakia |
| CM | Cameroon | LK | Sri Lanka | SN | Senegal |
| CN | China | LU | Luxembourg | TD | Chad |
| CS | Czechoslovakia | LV | Latvia | TG | Togo |
| CZ | Czech Republic | MC | Monaco | TJ | Tajikistan |
| DE | Germany | MD | Republic of Moldova | TT | Trinidad and Tobago |
| DK | Denmark | MG | Madagascar | UA | Ukraine |
| ES | Spain | ML | Mali | US | United States of America |
| FI | Finland | MN | Mongolia | UZ | Uzbekistan |
| FR | France | | | VN | Viet Nam |
| GA | Gabon | | | | |

Method and circuit arrangement for operating a high pressure discharge lamp.

The invention relates to a method for operating a high pressure discharge lamp wherein an alternating lamp current is supplied to the high pressure discharge lamp.

The invention also relates to a circuit arrangement for operating a high pressure discharge lamp comprising

- 5 - input terminals (K1, K2) for connection to a supply voltage source,
- means, coupled to the input terminals, for supplying an alternating lamp current to the high pressure discharge lamp.

10 Such a method and such a circuit arrangement are known from the American Patent 4,485,434. It has been found that AC operation of high pressure discharge lamps with a low frequency alternating lamp current prevents a rapid erosion of the electrodes of the high pressure discharge lamp (further also referred to as the lamp) and allows operation of the lamp with a relatively high efficacy.

15 A problem associated with the operation of this type of lamp is that depending on the temperature of the electrode and the condition of the surface of the electrode, the discharge arc in the direct vicinity of the electrode is often not stable because the origin of the discharge arc jumps from one spot on the surface of the electrode to the next. In case the surface of the electrode is too cold, the discharge arc is very thin in the
20 immediate vicinity of the electrodes and therefore causes overheating of its origin on the surface of the electrode thereby creating micropikes. During operation the origin of the discharge arc jumps between these micropikes, causing a flickering of the high pressure discharge lamp. Flickering can also be caused by too high an electrode temperature. Under such conditions the perpetual displacement and evaporation of electrode material are the
25 cause of instabilities in the discharge arc. In case a high pressure discharge lamp is operated with an AC current, each electrode of the lamp alternately functions as a cathode and as an anode during successive half periods of the lamp current. During these half periods the electrode is said to be in the cathodic phase and the anodic phase respectively. Electrode material, that is removed from the electrode in the anodic phase, returns to the electrode as a

stream of ions in the cathodic phase. These transport processes further complicate the behaviour of the electrode temperature during a period of the lamp current since the time dependency of the electrode temperature in the anodic phase differs from that in the cathodic phase. Because of this, the electrode temperature varies strongly over a period of the lamp current and the discharge arc originates from different places on the surface of the electrode during the anodic phase. In the cathodic phase, however, the origin of the discharge arc on the surface of the same electrode will be located arbitrarily in only one of these different places. This behaviour is particularly unacceptable in case the high pressure discharge lamp is used in an optical application such as projection television. In such an application the distance between the electrodes needs to be very short, since the discharge arc should approach a point light source. Because of the short distance between the electrodes, however, the fact that the discharge arc can originate from a different place on the electrode during every other cathodic phase causes instabilities through the whole discharge arc and therefore a very strong flickering.

15

The invention aims to provide a method for operating a high pressure discharge lamp and a circuit arrangement for operation of a high pressure discharge lamp in such a way that flickering of the lamp during operation is substantially suppressed.

20

According to the invention, a method of the kind mentioned in the opening paragraph is for this purpose characterized in that a current pulse is generated in a predetermined fraction of the half periods of the lamp current, said current pulse having the same polarity as the lamp current and being superimposed on the lamp current in the latter part of the half period in which it is generated.

25

Also according to the invention, a circuit arrangement of the kind mentioned in the second paragraph is for this purpose characterized in that the circuit arrangement further comprises means III for generating a current pulse in a predetermined fraction of the half periods of the lamp current, said current pulse having the same polarity as the lamp current and being superimposed on the lamp current in the latter part of the half period in which it is

30

generated.

Because the total amount of current flowing through the lamp is increased at the end of a predetermined fraction of the half periods of the lamp current by means of the current pulse, the temperature of the electrode is raised to a relatively high value. This high temperature increases the stability of the discharge arc, because the discharge arc originates

from the same place on the electrode in each cathodic phase. It has been found that when operating a high pressure discharge lamp, flickering can be substantially suppressed in case a method and/or a circuit arrangement according to the invention is used.

5 In addition it was found that in case the high pressure discharge lamp is a metal halide lamp the increased ion current caused by the current pulses leads to an increased deposition of metals comprised in the lamp plasma on the surface of the electrodes, whereby the work function of the electrodes is lowered.

The current pulses can be generated periodically (e.g. in every third or every fifth half period of the lamp current) or in bursts (e.g. during 5 successive half periods
10 a current pulse is generated, in the next 5 successive half periods no current pulse is generated, then in the next 5 successive half periods a current pulse is generated etc.).

Very good results have been obtained in case a current pulse is generated in each half period of the lamp current.

It has also been found that in case the current pulse has a higher
15 amplitude, it can be of a shorter duration in order to achieve the same results in terms of suppression of flickering. The optimum amplitude and duration of the current pulse depend on the type of lamp and the dimensions of the electrodes. Good results were obtained in case the frequency of the lamp current was selected from the range 50 Hz - 500 Hz, the ratio between the mean amplitude of the current pulse and the mean amplitude of the lamp current
20 was chosen between 0.6 and 2 and the ratio between the duration of the current pulse and half a period of the lamp current was between 0.05 and 0.15. The mean amplitude of the lamp current is the average value of the amplitude of the lamp current in half a period. The mean amplitude of the current pulse is the average value of the amplitude of the current pulse in the duration of the current pulse. Preferably the amount of energy supplied to the
25 high pressure discharge lamp by means of the current pulse is between 5% and 15% of the amount of energy supplied to the high pressure discharge lamp by the lamp current during one half period.

A circuit arrangement according to the invention can be manufactured in a relatively simple and inexpensive way in case the means for supplying an alternating lamp
30 current to the high pressure discharge lamp comprise means I coupled to said input terminals for generating a DC supply current out of a supply voltage supplied by the supply voltage source, and a commutator II for converting the supply current into an alternating lamp current. Preferably the means I for generating a DC supply current comprise a DC-DC-converter equipped with a switching element that is operated at a high frequency during lamp

operation and the means for generating a current pulse comprise means for adjusting the duty cycle or the switching frequency of this switching element. In this way the current pulse is generated using means that are also used to generate the alternating lamp current.

5 In an advantageous embodiment of a circuit arrangement according to the invention, the circuit arrangement comprises a power control loop equipped with means for generating a signal that is a measure for a desired amount of power consumed by the high pressure discharge lamp and the means for generating a current pulse comprise means for adjusting said signal.

10 In another advantageous embodiment the commutator comprises a full bridge circuit.

An embodiment of the invention will be further explained with reference to a drawing.

15 In the drawing, Fig. 1 shows an embodiment of a circuit arrangement according to the invention;

Fig. 2 shows an embodiment of a circuit arrangement according to the invention in accordance with Fig. 1;

20 Fig. 3 shows part of the circuit arrangement shown in Fig. 2 in more detail, and

Fig. 4 shows the shapes of currents and voltages present at different terminals of the circuit arrangement shown in Fig. 2 during lamp operation.

25 In Fig. 1, K1 and K2 denote input terminals for connection to a supply voltage source supplying a supply voltage. I, coupled to K1 and K2, are means for generating a DC supply current. Output terminals of means I are connected to respective input terminals of commutator II. Output terminals of commutator II are connected by the high pressure discharge lamp La. Means I and means II together constitute means A for
30 supplying an alternating lamp current to the high pressure discharge lamp. III are means for generating a current pulse in each half period of the lamp current. For this purpose means III are coupled to means A as indicated in Fig. 1 by means of a dotted line.

The operation of the circuit arrangement shown in Fig. 1 is as follows.

When input terminals K1 and K2 are connected to poles of a voltage

supply source, means I generate a DC supply current out of the supply voltage supplied by the voltage supply source. Commutator II converts this DC supply current into an alternating lamp current. In each half period of the lamp current, means III generate a current pulse having the same polarity as the lamp current and being superimposed on the lamp current in the latter part of each half period. Both the lamp current and the current pulses superimposed on the lamp current are supplied to the lamp La.

In Fig. 2, the means I for generating a DC supply current are formed by rectifier bridge RB, capacitors C1 and C2, driver circuit DC1, switching element S1, diode D1 and inductive element L. Commutator II consists in this embodiment of switching elements S2, S3, S4 and S5 together with driver circuits DC2 and DC3 and the resistor R1. Means III are formed by circuit parts CPI and CPII, comparator COMP, switching element S6, terminal K3, potentiometer R2, resistor R3 and additional circuitry for generating a substantially constant voltage at terminal K3 during lamp operation. This additional circuitry is not shown in the figure.

K1 and K2 denote input terminals for connection to a supply voltage source supplying a low-frequency AC supply voltage. K1 and K2 are connected to respective input terminals of rectifier bridge RB. A first output terminal of rectifier bridge RB is connected to a first side of capacitor C1. A further side of capacitor C1 is connected to a second output terminal of rectifier bridge RB. The first side of capacitor C1 is also connected to a first main electrode of switching element S1. A control electrode of switching element S1 is connected to an output terminal of driver circuit DC1. A further main electrode of switching element S1 is connected to a cathode of diode D1 and to an input of driver circuit DC1. An anode of diode D1 is connected to the further side of capacitor C1. The cathode of diode D1 is also connected to a first side of inductive element L. A further side of inductive element L is connected to both a first main electrode of switching element S2 as well as a first main electrode of switching element S4. The further side of inductive element L is also connected to a first side of capacitor C2. A further side of capacitor C2 is connected to the further side of capacitor C1. A further main electrode of switching element S2 is connected to a first main electrode of switching element S3 and a further main electrode of switching element S4 is connected to a first main electrode of switching element S5. A further main electrode of switching element S3 and a further main electrode of switching element S5 are connected to a first side of resistor R1 and a further side of resistor R1 is connected to the further side of capacitor C1. The further main electrodes of switching element S2 and switching element S4 are connected (during operating conditions) by a high pressure

discharge lamp La. A control electrode of switching element S2 and a control electrode of switching element S3 are connected to respective output terminals of a driver circuit DC2. A control electrode of switching element S4 and a control electrode of switching element S5 are connected to respective output terminals of a driver circuit DC3. The first side of resistor R1 and the further side of inductive element L are connected to respective input terminals of circuit part CPI. An output terminal of circuit part CPI is connected to a first input terminal of comparator COMP. A further input terminal of comparator COMP is connected to a first side of resistor R3 and a first side of potentiometer R2. A further side of potentiometer R2 is connected to a terminal K3. A further side of resistor R3 is connected to the further side of capacitor C1. Resistor R3 is shunted by switching element S6. An output terminal of comparator COMP is connected to an input terminal of driver circuit DC1. A first output terminal C of circuit part CPII is connected to a control electrode of switching element S6. Two further output terminals D and E of circuit part CPII are connected to respective input terminals of the driver circuits DC2 and DC3.

The operation of the circuit arrangement shown in Fig. 2 is as follows.

When input terminals K1 and K2 are connected to poles of a voltage supply source supplying a low-frequency AC supply voltage, this low frequency AC supply voltage is rectified by the rectifier bridge RB and converted into a DC-voltage being present over capacitor C1. Driver circuit DC1, switching element S1, diode D1 and inductive element L together function as a DC-DC-converter, more in particular as a down converter. This down converter converts the DC-voltage present over capacitor C1 into a DC supply current. Capacitor C2 functions as a buffer capacitor. The switching elements S2 and S5 on the one hand and the switching elements S3 and S4 on the other hand are rendered conductive and non-conductive alternately by means of the driver circuits DC2 and DC3. As a result the DC supply current is converted into an alternating lamp current. The voltages present at the input terminals of circuit part CPI are a measure for respectively the amplitude of the current flowing through the lamp and the supply voltage of the commutator. Circuit part CPI generates out of these two voltages a signal that is a measure for the power consumed in the lamp. This signal is present at the first input terminal of comparator COMP. During lamp operation a substantially constant voltage is present at terminal K3. This voltage is generated by means that are not shown in Fig. 2. By means of potentiometer R2, resistor R3 and switching element S6 a reference voltage is generated that is present at the second input terminal of comparator COMP and is a measure for a desired amount of power consumed in the lamp. In dependence on the output signal of comparator COMP, driver

circuit DC1 controls the pulse width of the high frequency pulses generated by it. This pulse width in turn controls the amplitude of the current flowing through the lamp. During the first part of each half period of the lamp current switching element S6 is rendered conductive. As a result the reference voltage present at the second input terminal of comparator COMP is relatively low. As a consequence, the pulse width of the high frequency pulses generated by driver circuit DC1, the amplitude of the current flowing through the lamp and therefore the amount of power consumed by the lamp all have a relatively low value. In the latter part of each half period of the lamp current, circuit part CPII renders switching element S6 non-conductive. The reference voltage is thereby increased and as a result, the duty cycle of the driver signal generated by driver circuit DC1 is increased, a current pulse is superimposed on the lamp current and the amount of power consumed by the lamp is increased.

Fig. 3 shows that circuit part CPII consists of three circuit parts: CPIII to CPV. CPIII is a digital circuit having a first output terminal A and a second output terminal B. During lamp operation a first digital signal having the same frequency as the lamp current is present at output terminal A. At a second output terminal B of circuit part CPIII a second digital signal also having the frequency of the lamp current is present. The time dependencies of both signals are shown in figure 4 by means of the curves marked A and B respectively. It can be seen that the second digital signal can be derived from the first digital signal by inverting the first digital signal and shifting its phase over half a period. Output terminals A and B are connected with respective input terminals of circuit part CPV. Circuit part CPV functions as an "or-gate", so that the digital signal present at its output terminal C is "high" when either the first or the second digital signal is "high", while the other signal is "low". In all other situations the digital signal present at output terminal C is "low". The time dependency of the digital signal present at output terminal C is shown in figure 4 by means of the curve marked C. Output terminal C is connected to an input terminal of circuit part CPV. Circuit part CPV is a "bistable multivibrator" or a "flipflop". At a first output D of circuit part CPV a digital signal is present that is "high" between successive slopes of the digital signal present at output terminal C, during which this latter signal changes from "low" to "high". At a second output E of circuit part CPVI a digital signal is present that is "high" and "low", when the digital signal present at output terminal D is "low" and "high" respectively. The time dependencies of the digital signals present at output terminals D and E of circuit part CPV are shown in Fig. 4 by means of curves marked D and E respectively. Output terminal C is connected to the control electrode of switching element S6 in Fig. 2, so that switching element S6 is conductive when the digital signal at output terminal D is high.

The duration of the current pulse is therefore equal to the time interval during which the digital signal at output terminal D is high. The curve marked I in Fig.4 shows the time dependency of the amplitude of the total amount of current flowing through a high pressure discharge lamp, in case such a lamp is operated by means of a circuit arrangement according to the invention. Curve I represents the lamp current as a substantially square wave shaped AC current while the current pulse is also shaped rectangularly. It be mentioned that these shapes of both lamp current and current pulse are not essential for the present invention. In fact the shape of the current pulse can for instance be sinusoidal, triangular or exponential.

A practical embodiment of a circuit arrangement as shown in Fig. 2 has been used for the operation of a high pressure discharge lamp as described in German Patent 3813412. The lamp had a nominal power consumption of 100 Watt and an electrode distance of only 1.4 mm. When a current pulse having a mean amplitude of 0.9 A was superimposed on the lamp current (having a mean amplitude of 1.1 A and an alternating frequency of 90 Hz) during the latter 8 % of each half period, flickering could be substantially suppressed.

CLAIMS:

1. Method for operating a high pressure discharge lamp wherein a alternating lamp current is supplied to the high pressure discharge lamp, characterized in that a current pulse is generated in a predetermined fraction of the half periods of the lamp current, said current pulse having the same polarity as the lamp current and being superimposed on the
5 lamp current in the latter part of the half period in which it is generated.
2. Method according to claim 1, wherein said current pulse is generated in each half period of the lamp current.
3. Circuit arrangement for operating a high pressure discharge lamp comprising
10 - input terminals (K1, K2) for connection to a supply voltage source,
- means, coupled to the input terminals, for supplying an alternating lamp current to the high pressure discharge lamp,
characterized in that the circuit arrangement further comprises means III for generating a
current pulse in a predetermined fraction of the half periods of the lamp current, said current
15 pulse having the same polarity as the lamp current and being superimposed on the lamp current in the latter part of the half period in which it is generated.
4. Circuit arrangement according to claim 3, wherein the means III generate a current pulse in each half period of the lamp current.
5. Circuit arrangement as claimed in claim 3 or 4, wherein the means for
20 supplying an alternating lamp current to the high pressure discharge lamp comprise
- means I coupled to said input terminals for generating a DC supply current out of a supply voltage supplied by the supply voltage source,
- a commutator II for converting the supply current into an
25 alternating lamp current.
6. Circuit arrangement as claimed in claim 5, wherein the means I for generating a DC supply current comprise a DC-DC-converter equipped with a switching element that is operated at a high frequency during lamp operation and the means for generating a current pulse comprise means for adjusting the duty cycle of the switching

element.

7. Circuit arrangement as claimed in claim 5 or 6, wherein the means for generating a DC supply current comprise a DC-DC-converter equipped with a switching element that is operated at a high frequency during lamp operation and the means for
- 5 generating a current pulse comprise means for adjusting the switching frequency of the switching element.
8. Circuit arrangement as claimed in one or more of the previous claims, wherein the frequency of the lamp current has been selected from the range 50 Hz - 500 Hz, the ratio between the mean amplitude of the current pulse and the mean amplitude of the
- 10 lamp current is between 0.6 and 2 and the ratio between the duration of the current pulse and half a period of the lamp current is between 0.05 and 0.15.
9. Circuit arrangement as claimed in one or more of the previous claims, wherein the amount of energy supplied to the high pressure discharge lamp by means of the current pulse is between 5% and 15% of the amount of energy supplied to the high pressure
- 15 discharge lamp by the lamp current during one half period.
10. Circuit arrangement as claimed in one or more of the previous claims, wherein the circuit arrangement comprises a power control loop equipped with means for generating a signal that is a measure for a desired amount of power consumed by the high pressure discharge lamp and the means for generating a current pulse comprise means for
- 20 adjusting said signal.
11. Circuit arrangement as claimed in Claim 5, 6 or 7, wherein the commutator comprises a full bridge circuit.

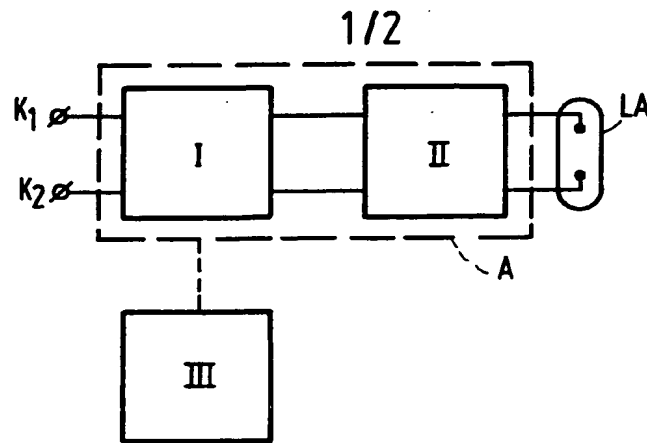


FIG.1

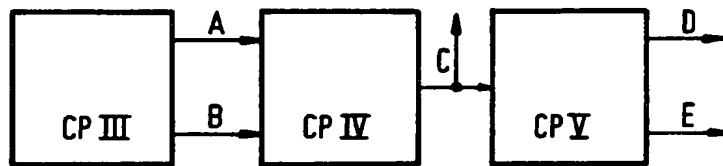


FIG.3

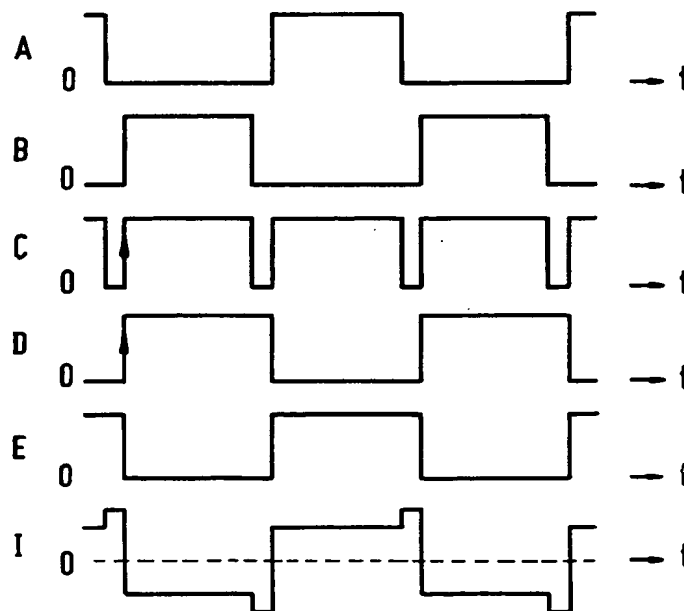


FIG.4

2/2

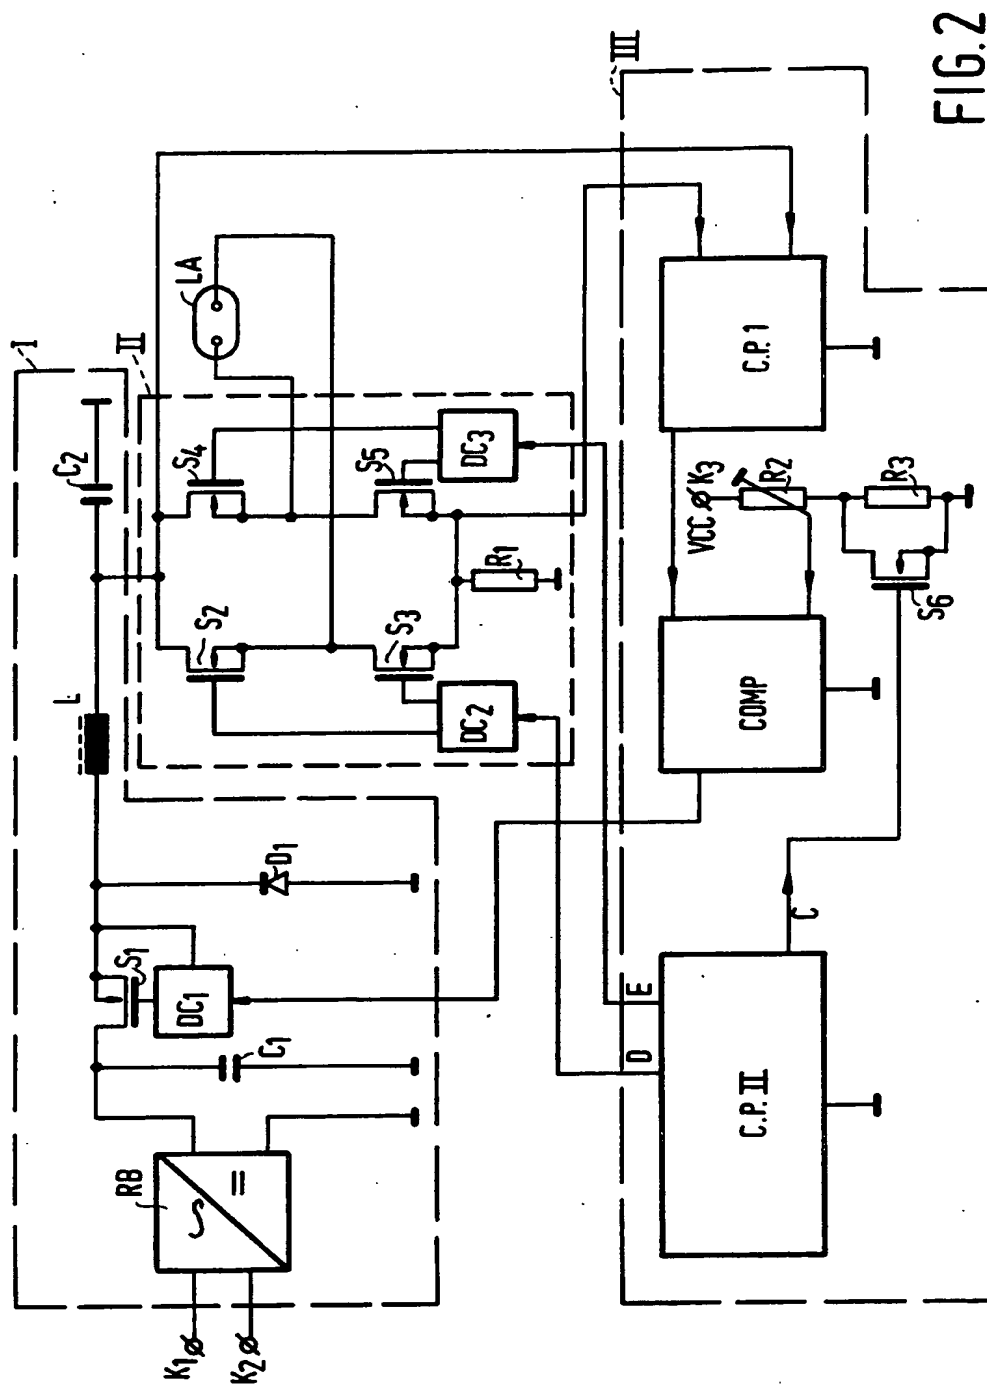


FIG. 2

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB 95/00392

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H05B 41/231

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DIALOG

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|---------------------------------------------------------------------------------------------------------|-----------------------|
| X | EP 0389847 A2 (HEINRICH KORTE), 3 October 1990 (03.10.90), page 5, line 34 - line 39, figure 7 -- | 1-11 |
| A | WO 9008399 A1 (GTE LICHT GMBH), 26 July 1990 (26.07.90), abstract -- | 1-11 |
| A | US 5130605 A (S. OGAWA ET AL.), 14 July 1992 (14.07.92), abstract ----- | 1-11 |

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 November 1995

Date of mailing of the international search report

14-11-1995

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Anders Axberger
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB 95/00392

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|-------------------------------------------|---------------------|----------------------------|---------------------|
| EP-A2- 0389847 | 03/10/90 | AT-T- 118666 | 15/03/95 |
| | | CA-A- 2012441 | 16/09/90 |
| | | CN-B- 1024979 | 08/06/94 |
| | | CN-A- 1045677 | 26/09/90 |
| | | DE-D- 59008453 | 00/00/00 |
| | | ES-T- 2068266 | 16/04/95 |
| | | JP-A- 3173347 | 26/07/91 |
| | | US-A- 5070276 | 03/12/91 |
| WO-A1- 9008399 | 26/07/90 | DE-A,C- 4001526 | 02/08/90 |
| | | DE-D,T- 68920155 | 11/05/95 |
| | | EP-A,B- 0454665 | 06/11/91 |
| US-A- 5130605 | 14/07/92 | JP-A- 4212258 | 03/08/92 |